

Technical Data Sheet

Product: DT028



THE EDGE
ON SAFETY

DESCRIPTION

We have designed this product to provide a low impact gradual transition between carpet and uncovered floor substrate. Designed for 5mm height variations. The profile surface also provides a nice zone to protect the carpet and vinyl scrubbers during cleaning.

MATERIAL

T6 6063 Alloy aluminium - Natural Satin anodised.


Standard 2.5 Meter Lengths.

1 x 13mm Insert.


Supplied pre drilled for countersunk screw fixing.

DIMENSIONS

EXAMPLE

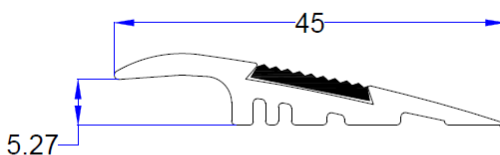

In this example, DT028 has been installed for a smooth transition as a gradual ramp, between 5mm carpet and uncovered floor. The profile uses slip resistant Tredsafe Diamondtred insert for safety, which meets standards of AS/NZS 3661.1:1991 and NZS 4586:2013.

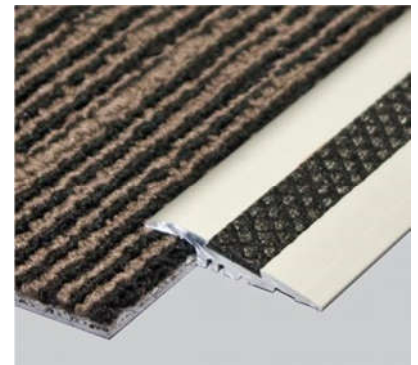

For PDF and CAD drawings with full dimensions and installation guides, please refer to our website www.tredsafe.co.nz

Release: January 2019

Information given in this data sheet is based on the current state of knowledge. This does not exempt the purchaser from carrying out his own careful inspections of incoming goods and their suitability for local building codes. We reserve the right to make changes to the product data in the course of technical progress or due to operationally related further development. Owing to factors beyond our control during application, recommendations given in this data sheet require tests and experiments by the customer. Our recommendations do not exempt the customer from the obligation to check any infringements of third-party rights himself and eliminate them if necessary. The suggestions for product use are not equivalent to a warranty of its suitability for the recommended purpose.

Each new release of this data sheet supersedes the previous one.